

Rail Crossing

“The Evans Road Connector Project will include an at-grade rail crossing over the CN Railway main line. Work on crossing signal and crossing surface design is complete. Material supply is underway with construction expected in the spring of 2009.”

Night Work On The Trans Canada Highway

Relocation of the Trans Canada Highway changeable message sign was necessary due the new Evans Road Interchange on-ramp. This relocation was completed at night to reduce the traffic effects on the motoring public.



Connection To Ashwell Road

Work has begun on the north end of the project where the Ashwell Road connection will occur. Road base materials and some underground utilities have been placed.



Project Partners



The Best Place on Earth




City of Chilliwack



More Information:

This project will result in long term changes to commuting and traffic patterns. A simplified route plan and other information are posted on the City website at www.chilliwack.com/evans and will be updated regularly. If you still have questions about the project, please contact the Engineering Department at City Hall at 604-793-2907.

Evans Interchange/Connector Project

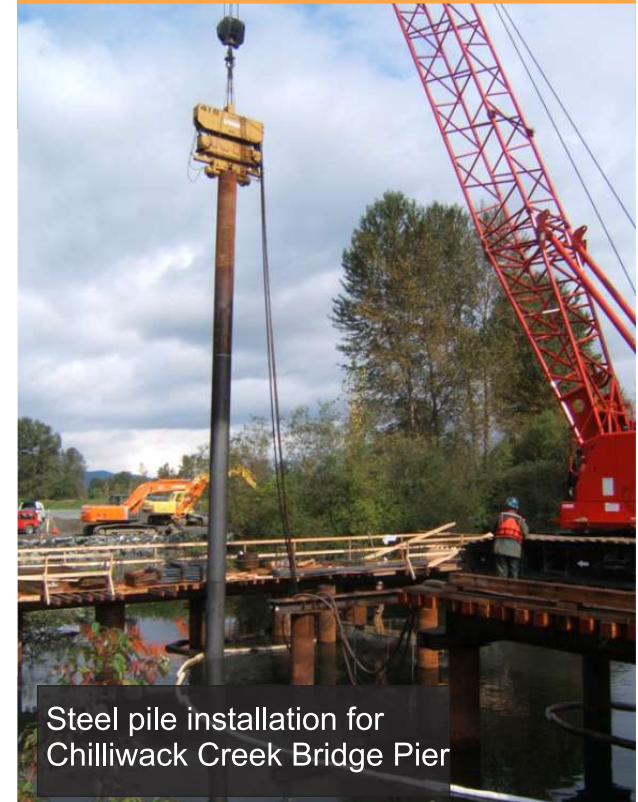

Steel pile installation for Chilliwack Creek Bridge Pier

Winter 2009!

- Project Update -

Soil Densification




Bridge construction begins with foundation work. Underlying soils, as deep as 12 metres, have been strengthened with a soil densification process. This work will ensure post construction settlement is minimized.

The closure below will be in place until approximately June 2009.



Proposed Roundabout at Evans/Yale Intersection

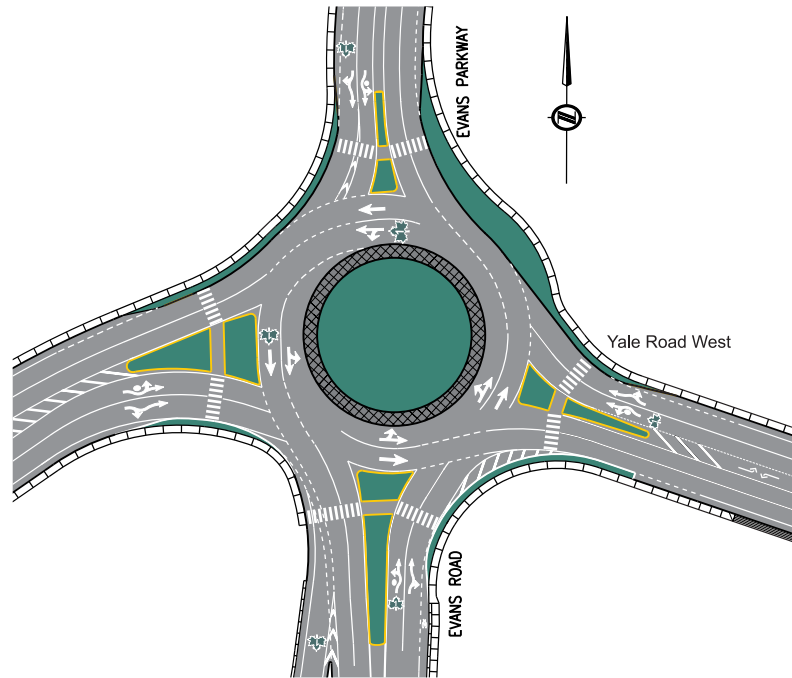

Bridge Construction Over Chilliwack Creek Diversion



The pre-cast concrete girders are placed using a 500 ton capacity mobile crane. The Chilliwack Creek Division bridge is the shortest of two waterway bridges.

Utility Relocation Work

To construct the Trans Canada Interchange at Evans Road, existing utilities need to be relocated. This photo illustrates the new watermain installation under the Trans Canada Highway, replacing the existing main.

