










*	Regulatory Speed Limit	50 km/h	60 km/h	70 km/h	80 km/h	90-100 km/h
1a	Taper Length For Lane Closure	35 (1:10)	55 (1:15)	75 (1:20)	90 (1:25)	110 (1:30)
1b	Taper Length For Shoulder Work on Where TCPs Used (Min. 3 Cones)	5	8	10	12	15
2	Maximum Distance Between Cones or Tubular Markers for 1a	10	10	10	10	10
3	Minimum Tangent Distance Between Tapers	30	60	90	120	150
4	Distance Between Construction Signs	40	60	80	100	150

**LEGENDS:**

-  SIGN STAND
-  DELINEATORS
-  TCP
-  ARROWBOARD TRUCK
-  POLE
-  REMOVE POLE
-  MANHOLE/SERVICE BOX
-  NEW TRENCH
-  NEW U/G CABLE


**Scope:**  
- TELECOM MAINTENANCE WORK

**Dates:**  
- ASAP

**Hours:**  
- NIGHT – 7PM TO 6AM


**Notes:**

- All traffic control devices and signs to comply with Latest MOTI Manual Work on Roadway
- Notify BC Transit – Chilliwack Transit System of work and any bus stop relocates

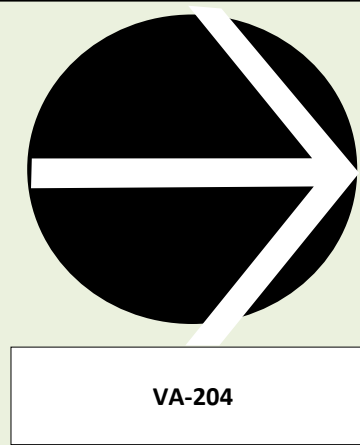

**COMPANY:** DIXON NETWORKS CORPORATION

**CONTACT:** JOHNNY WOO  
PHONE: 604-940-8817 EXT. 238



**DESIGN. BUILD. DELIVER.**